

2001 – 2003 GMC Duramax Modified 6.6 Fitch Part # F1008186BD



Do not smoke or be near open flame while performing installation. Wear eye protection as the fuel system is under pressure.

Kit includes

- Installation bracket, fuel line disconnect tool, and cable/zip ties.
- EFI multi port fuel injection hose and fuel line quick connect fittings.



Installation Procedure

- Screw the 90° fittings into the top and bottom of the Fitch unit. Tighten down the lock nut on the 90° fittings.
- Using the 18" hose with the female plastic fitting, screw the opposite end to the 90° fitting at the top of the Fitch unit and the 6" male hose to the bottom of the Fitch unit.
- This kit is designed for mounting location of the driver's side stud on the brake master cylinder. Remove the nut on the stud, and slide the bracket over the stud. Tighten down the original nut removed previously.
- Unscrew the filler cap to release residual pressure in the fuel system.
- Locate the fuel **RETURN** line (smaller of the 2 lines) containing the fuel line quick connect fitting. This connection is located at the rear of the motor, near the driver's side fire wall.
- Disconnect the fuel line using the enclosed disconnect tool. There will be a 1/2" and 3/8" connection at the rear of the engine. You will be using the top line which is the 3/8". Refer to page 2.
- Install the factory female quick connect fitting by sliding it onto our Fitch male quick connect until it bottoms out. Connect the Fitch female quick connect over the factory male and push the locking tab over. Snap in the secondary locking clip on the Fitch female.
- Turn the key to the "on" (not crank) position, wait 10 seconds, turn the key off and repeat 4 – 5 times. This is to prime the fuel system.
- Double check all connections for leaks, and also make sure fuel lines do not come in contact with any of the exhaust, intake, or cooling system components. Priming/Bleeding the system may be needed but varies with every installation to ensure the removal of any air in the fuel line.
- Start vehicle and hold steadily at 1500 rpm for 60 seconds to cycle fuel through system to eliminate air in system.



Manufacturer's Warranty

The Fitch® Fuel Catalyst products have a ninety (90) day money back guarantee provided the installation instructions were followed correctly and the return of the product is based either on product defect or dissatisfaction with the product's performance. The Fitch Fuel Catalyst device is guaranteed to be free from defects in material and workmanship for a period of 250,000 miles (defined by EPA in 40 CFR 85.117), or 5,000 operating hours from the date of installation. The manufacturer warrants that the installation of Fitch Fuel Catalyst product on a vehicle will not cause the emissions noncompliance of the engine on which it is installed for the life of the catalyst from the date of installation

OTHER THAN THE WARRANTIES HEREIN CONTAINED, THERE IS NO OTHER WARRANTY, WHETHER EXPRESSED OR IMPLIED (INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE) THAT SHALL EXIST IN CONNECTION WITH THE SALE OR USE OF ANY FITCH FUEL CATALYST PRODUCT. The Manufacturer assumes no liability for faulty or improper application of its products or resulting from collision or abuse. All claims under the Manufacturer's warranty must be made during the applicable warranty period and the product claimed defective or non-conforming returned by Buyer. Return the defective device along with dated proof of


purchase to the distributor from which the device was purchased so that the distributor may handle your warranty claim in an expeditious manner. Manufacturer will repair, or at its option, replace any defective or non-conforming product and return the repaired or replacement product without charge.

SUCH REPAIR OR REPLACEMENT IS THE EXCLUSIVE REMEDY (WHETHER UNDER THE THEORIES OF BREACH OF CONTRACT OR WARRANTY, NEGLIGENCE, STRICT LIABILITY OR ANY OTHER LEGAL THEORY) AVAILABLE FROM MANUFACTURER AND MANUFACTURER IS NOT RESPONSIBLE FOR DAMAGES OF ANY KIND, INCLUDING INCIDENTAL AND CONSEQUENTIAL DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OF THIS CONTRACT.

Manufacturer's warranties shall not be enlarged, diminished or affected by, and no obligation or liability shall arise or grow out of Manufacturer's rendering of technical advice or in service in connection with an order or the goods furnished. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages or exclusions of implied or deemed conditions or warranties, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights that vary from jurisdiction to

IMPORTANT NOTES

For any questions please call APSI toll free at 1-888-881-2774. Any variations from these instructions should also be pre-approved by APSI. After installation is complete, (if convenient) drive the vehicle over 50 miles per hour for a minimum of 20 minutes with at least 2 start and stop procedures. This procedure will reset the computers memory on EFI engines to sense the treated fuel. For diesel engines and all other gasoline engines, disconnecting the battery is good safe practice.

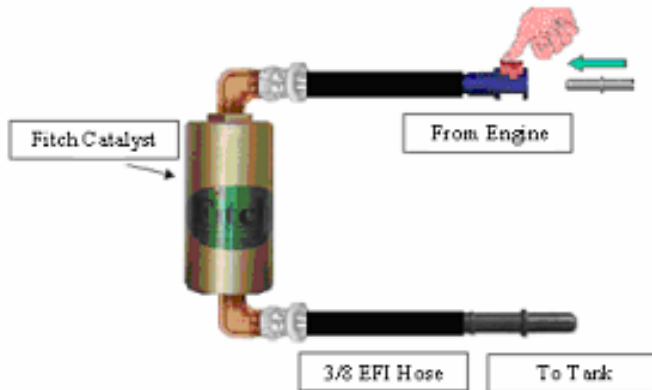

Insert the disconnect tool into the factory "quick connect" fitting



If you have difficulties with this procedure, contact your local automotive garage for assistance.