



For use with all ultra low and low sulfur fuels

# LUBRICITY™ Plus FUEL POWER

**Lubricity Plus Fuel Power** is a premium year-round diesel fuel treatment that increases the lubricity of both #2 and #1 low sulfur and ultra low sulfur fuels to exceed all ASTM standards.

**Lubricity Plus Fuel Power** is superior to all other diesel fuel lubricity improvers on the market today.

**Lubricity Plus Fuel Power** improves cetane rating.

**Lubricity Plus Fuel Power** additionally provides all the benefits of FPPF Fuel Power.

## Product Benefits


- Exceeds ASTM and engine manufacturers most recent recommended lubricity standards for ultra low sulfur diesel fuel when used as directed
- Helps prevent rotary and piston fuel pump wear and reduce pintle scoring
- One 32 oz. bottle treats 250 gallons of diesel fuel
- Ideal for lubricating blended fuels
- Formula contains less than 15 ppm sulfur
- Disperses water in the fuel system
- Decarbonizes the entire fuel injection system
- Helps prevent sludge in diesel fuel
- Increases engine power
- Helps prevent fuel icing
- Improves cetane



Recommended for ULSD and all biodiesel/diesel fuel blends



Works in all types of diesel fuel, including #1 & #2 diesel fuel blends

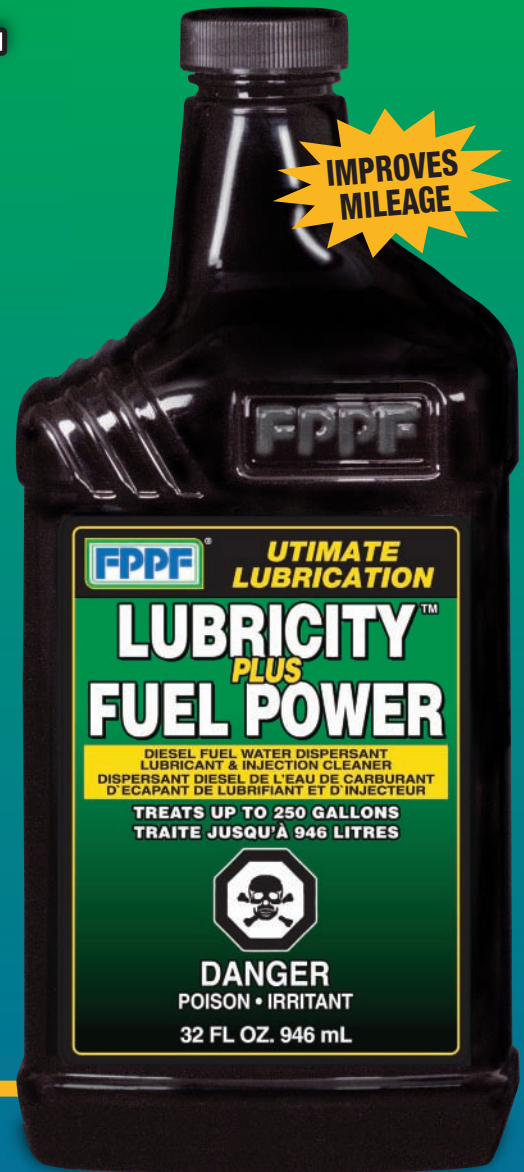

*Specifically Formulated for Year-Round Diesel Fuel Treatment*

MADE IN  THE USA

*The year-round diesel fuel treatment that increases the lubricity of both #2 and #1 low sulfur and ultra low sulfur fuels.*



The Premium Fuel Additive Company

FPPF CHEMICAL COMPANY, INC.

# LUBRICITY Plus FUEL POWER

## Product Data Sheet



LUBRICITY Plus Fuel Power is a year-round diesel fuel treatment that combines the benefits of Fuel Power and a superior lubricity additive that exceeds the A.S.T.M., HFRR and B.O.C.L.E. standards for ultra low sulfur diesel.

### DIRECTIONS:

**Quart Size:** Add entire contents to any diesel fuel to treat up to 250 gallons. For best results add prior to refueling. Use half of the container in each 120 gallon side fuel tank. Bulk tank treatment ratio 1:1000

### PRODUCT CHARACTERISTICS:

Boiling Point: >300°F  
 Flash Point: 112°F  
 Specific Gravity: 0.83  
 Evaporation Rate: < Butyl Acetate  
 Odor: Solvent-like  
 Appearance: Clear to hazy amber


**WARNING:** Keep out of reach of children. Do not swallow. Do not breathe vapors. Use in a well-ventilated area.

**FIRST AID:** If swallowed induce vomiting – seek medical attention.

**Skin and eye contact** – wash with water for 15 minutes and seek medical help. Consult product SDS for proper handling, spill and storage procedures.


### HFRR TEST (ASTM 6079)

#### Ultra Low Sulfur Diesel Fuel Lubricity Evaluation

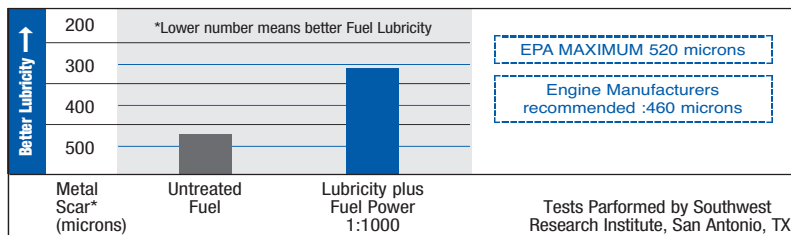

### Diesel Fuel Lubricity Additive Performance Evaluation

#### SCUFFING B.O.C.L.E. TEST (U.S. Army method)

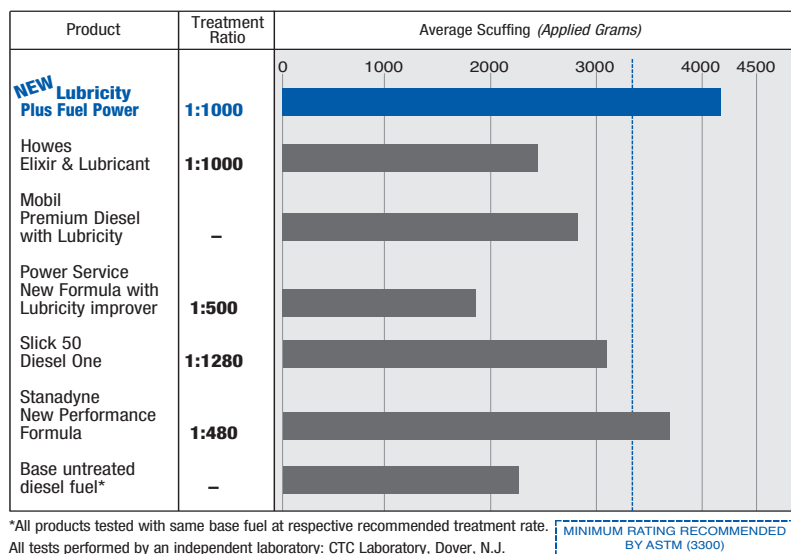

### Packaging:

Stock #	Size	Qty/Case	Treats	Case Weight
00105	32 ounce bottle	12/case	up to 250 gallons	28lbs.
00112	5 gallon pail	1	up to 5,000 gallons	45lbs.
00113	55 gallon drum	1	up to 55,000 gallons	450lbs.

DISTRIBUTED BY:



**FPPF CHEMICAL COMPANY, INC.**  
 117 WEST TUPPER STREET  
 BUFFALO, NEW YORK 14201  
 TEL: (716) 856-9607

**1-800-735-3773**

FAX: (716) 856-0750  
 E-MAIL: sales@fppf.com  
 WEBSITE: www.fppf.com



Like us on Facebook

