



Description: Head Light  
Part Number: 111159 - 111160 -111269 -111270  
Application: 2009-2013 Dodge Ram



Tools needed: 10mm socket,  
flat head screwdriver



Locate the eight push pins  
located at the top of the grill  
on remove them.



Remove the plastic shroud.




Locate the two 10mm screws  
and remove them.



Pull back the wheel well cover  
to expose the single 10mm  
bolt and remove it.



Pull off the front bottom  
body shroud.

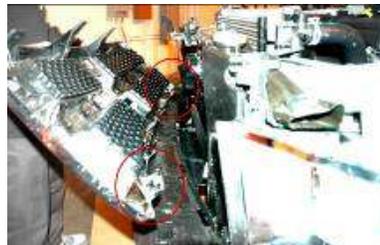

Locate the two bottom pins to  
remove the grill from the truck.



Remove the two 10mm bolts  
holding in the headlight.



Pull back the wheel well cover  
and locate the white locking pin  
and pull down to release the lock.



Remove the headlight assembly  
from the truck.



Twist off the parking bulb and  
disconnect the head light wire  
harness.



Unclip the parking bulb from wire harness.



Take out the new projector halo led headlight from the box.



Re-clip the parking light socket into the new headlight.



Re-clip the headlight wire harness into the new headlight.



Test all functions before driving.



*AnzoUSA™ products are covered, by a limited one (1) year warranty, to be free of manufacturer's defects. However, certain AnzoUSA™ product categories have warranty policies which differ from this standard, please contact your representative for detailed category information. Damage due to improper installation or road hazards is not covered. Seller and manufacturers' only obligations shall be to replace the product proven to be defective. Neither seller nor manufacturer shall be liable for any injury, loss or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user shall determine the suitability of the product for its intended use, and user assumes all risk and liability whatsoever in connection therewith.*